


19" high density modular patch panel, shielded, 24 port, 0.5U

Product Code: [LAN-PPC24OK-STP](#)

19" high density modular patch panel, shielded, 24 port, 0.5U

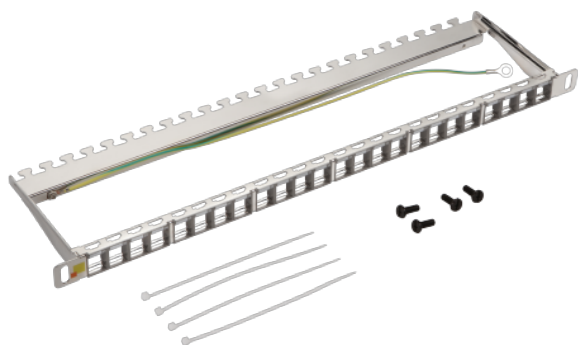


Description

High density modular shielded patch panel designed for installation of Keystone modules up to 17.1 mm wide (see compatible items).

Package included:

- Patch panel - 1 pc.
- Cable retention bracket - 1 pc.
- Grounding conductor - 1 pc.
- Mounting kit for cabinet rails - 4 pcs.
- Cable tie - 4 pcs.

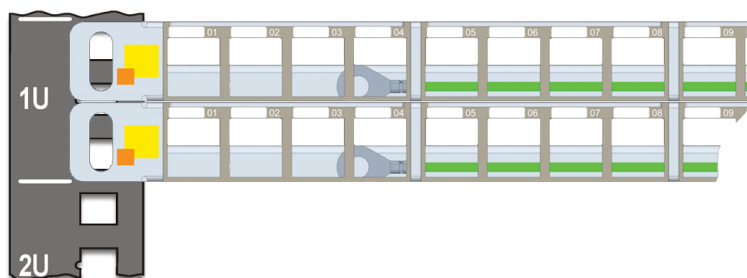

The panel has 24 ports and a height of only 0.5U, which allows you to place two patch panels in a 1U space. Thus, the panels provide a 50% increase in the density of the network connections.

The panel ports are numbered on the front side. The panel has small areas for additional port labels.

The metal frame of the panel provides reliable grounding. The panel can be mounted in a 19 " rack, cabinet, or wall frame, and wall-mounted (with optional brackets).

A cable retention bracket is added to the panel set for ease of installation and additional fastening of the cable. The use of the bracket provides the required bending radius and reliable fixing of cables during termination and subsequent operation. The cable is fastened with plastic ties using special holes in the bracket.

It is possible to use a panel with the following types of connectors for multimedia systems:

- BNC connectors
- Fiber optics connectors
- Audio connectors
- Video connectors

Model range

LAN-PPC24OK-STP	19" high density modular patch panel, shielded, 24 port, 0.5U
-----------------	---

Product descriptions are listed according to the available information at the time of publication. Product specifications can be changed without advanced notification. More detailed and exact information can be obtained from the official partners and distributors of LANMASTER.