


TWT FTP cable, two pairs, category 5e, outdoor, 305 meters

Product Code: [TWT-5EFTP2-OUT](#)

TWT FTP cable, two pairs, category 5e, outdoor, 305 meters

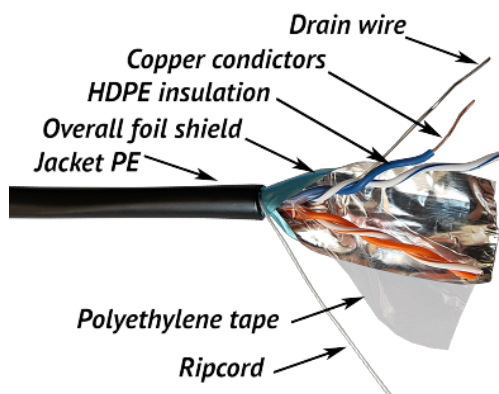

Description

Two pairs cables are budget solution for voice, fire alarm, security and Ethernet network (except Gigabit Ethernet which requires 4-pairs cable) cabling, for connecting xDSL modems.

The cable is suitable for outdoor installation. Polyethylene jacket reliable protects cable from harsh environment, does not degrade under Solar radiation, and allows operational temperatures from -40°C до +75°C

The cable comprises two pairs of solid copper 24 AWG conductors. Each conductor is insulated with HDPE (high density polyethylene). Two conductors are twisted with specially selected step in a single twisted pair. Cable has a common aluminum polyester foil shield under outer jacket. Two twisted pairs are covered with single PE (polyethylene) jacket.

Specification	Value
Jacket Color	Black
Jacket Material	PE (polyethylene)
Insulation Material	HDPE (high density polyethylene)
Conductor Gauge, single	24 AWG
Conductor Type	Solid
Shield Material	Aluminum polyester foil over two pairs
Cable Diameter	5,2mm ± 0,3
Operating Temperature	-40 °C to +75 °C
Cable Length per Box	305 m
Nominal Velocity Propagation (NVP)	67%
Regulatory Certifications	ETL VERIFIED
Regulatory Compliance	TIA/EIA 568-D.2 cat. 5e

Model range

TWT-5EFTP2-OUT	TWT FTP cable, two pairs, category 5e, outdoor, 305 meters
----------------	--

Product descriptions are listed according to the available information at the time of publication. Product specifications can be changed without advanced notification. More detailed and exact information can be obtained from the official partners and distributors of LANMASTER.