

10" Wall enclosure with glass door, 312x300, gray, 236 mm equipment mounting dimension




Product Code: [TWT-CBW10G-xU-3x3-GY](#)

10" Wall enclosure with glass door, 312x300, gray, 236 mm equipment mounting dimension

Description

A 10" wall enclosure is used to house network and telecommunication equipment. The enclosures are available with a depth of 300mm.

The equipment can only be installed on two rails using front mount shelves. These rails can be installed at any depth and allow for depth changes in certain increments, even during operation, after the equipment has been installed.

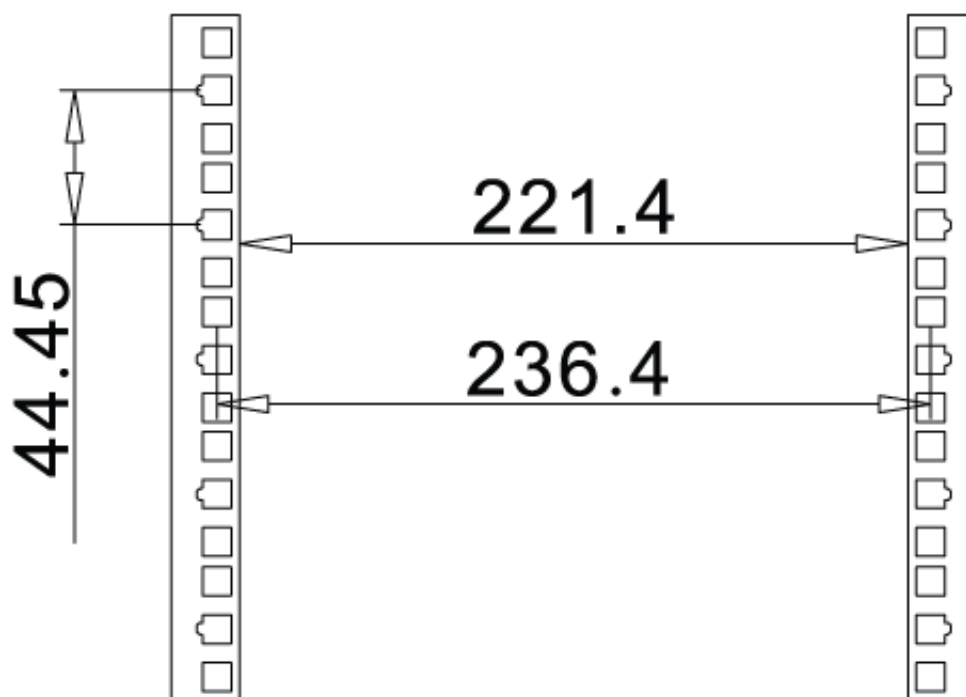

There are no universal mounting width standards for 10-inch enclosures. Typically, there are two mounting dimensions for 10-inch enclosures.

In this enclosure, this dimension is 236 mm.

Please ensure that the center distance of the equipment to be installed matches the mounting dimension of the enclosure when selecting it.

The front door is equipped with a lock and a glass insert. It can be hinged to the other side if necessary.

The enclosure has cable entry holes at the top and bottom, which are covered with protective covers.

The enclosure is supplied assembled.

Color is gray (RAL 7035). Powder coating painting.

The maximum load on the enclosure is 30 kg.

Ingress protection is IP20.

Model range

TWT- CBW10G-12U-3x3-GY	10" Wall enclosure with glass door, 12U, 312x300, gray, 236 mm equipment mounting dimension
TWT- CBW10G-6U-3x3-GY	10" Wall enclosure with glass door, 6U, 312x300, gray, 236 mm equipment mounting dimension
TWT- CBW10G-9U-3x3-GY	10" Wall enclosure with glass door, 9U, 312x300, gray, 236 mm equipment mounting dimension

Product descriptions are listed according to the available information at the time of publication. Product specifications can be changed without advanced notification. More detailed and exact information can be obtained from the official partners and distributors of LANMASTER.