


RJ45 Keystone module, category 5E, STP, 180 degrees

Product Code: [TWT-OK45STP180/5E](#)

RJ45 Keystone module, category 5E, STP, 180 degrees

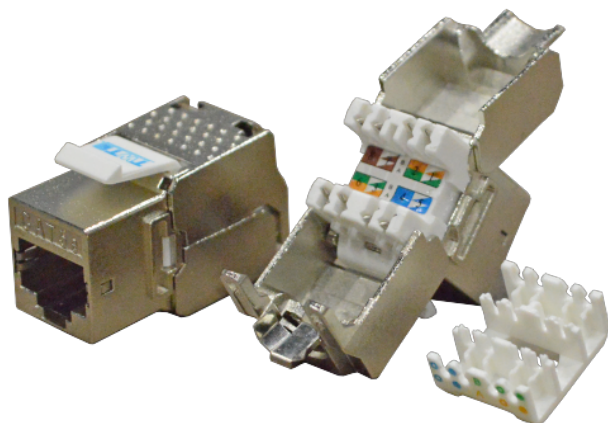

Description

The module can be used to complete shielded telecommunication sockets installed in wall trunks, in a wall box, also for installation in modular patch panels (see the compatibility items).

The module has a standard Keystone form-factor and can be used not only in LANMASTER socket adapters, but also in socket adapters from other manufacturers.

Category 5E compliant.

There is a shielded eight-pin RJ-45 socket on the front side of the module and a block for eight contacts of the IDC110 type, located at an angle of 180° to the front surface of the module, on the back side.

The continuity of the screen is ensured by tightening the halves of the cover, the halves should be fixed with the supplied tie.

The insulation displacement contact method is used (IDC) to terminate incoming cable.

The cable wires are laid out in the grooves on the module cover, excess is cut off. When the halves of the housing cover are snapped in, the contacts cut through the wire insulation. Thus, the incoming cable can be easily terminated without the use of tools. The cover is color coded to match the T568A and T568B wire maps.

Model range

TWT-OK45STP180/5E	RJ45 Keystone module, category 5E, STP, 180 degrees
-------------------	---

Product descriptions are listed according to the available information at the time of publication. Product

specifications can be changed without advanced notification. More detailed and exact information can be obtained from the official partners and distributors of LANMASTER.