


TWT FTP cable, 4 pairs, category 5e, LSZH

Product Code: [TWT-5EFTP-LSZH](#)

TWT FTP cable, 4 pairs, category 5e, LSZH

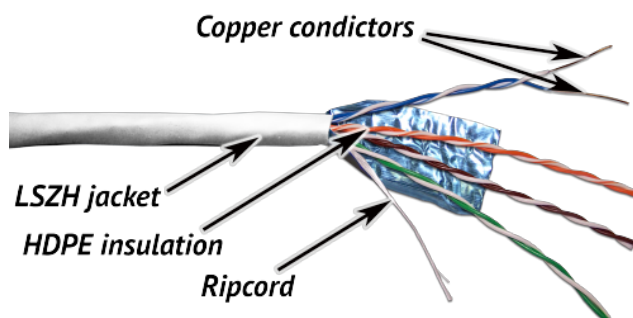

Description

Shielded four pairs category 5e cable is designed for digital and analog signals transmission on frequencies below 100 MHz.

The cable comprises four twisted pairs of solid copper conductors with overall foil shield under a single jacket.

Specification	Value
Jacket Color	White
Jacket Material	LSZH (low smoke, zero halogen)
Insulation Material	HDPE (high density polyethylene)
Conductor Gauge, single	24 AWG
Conductor Type	Solid
Cable Diameter	5.9 mm
Shield Material	Aluminum polyester foil over 4 pairs
Operating Temperature	-20 °C to 75 °C
Cable Length per Box	305 m
Nominal velocity propagation (NVP)	66%
Regulatory Certifications	ETL VERIFIED
Regulatory Compliance	TIA/EIA 568-D.2 cat. 5E, ISO/IEC 11801-1:2017; EN 50173

Model range

--	--

TWT-5EFTP-LSZH	TWT FTP cable, 4 pairs, category 5e, LSZH
----------------	---

Product descriptions are listed according to the available information at the time of publication. Product specifications can be changed without advanced notification. More detailed and exact information can be obtained from the official partners and distributors of LANMASTER.