


RJ45 Keystone module, category 6, UTP, 90 degrees, white

Product Code: [TWT-OK45UTP/6-xx](#)

RJ45 Keystone module, category 6, UTP, 90 degrees, white

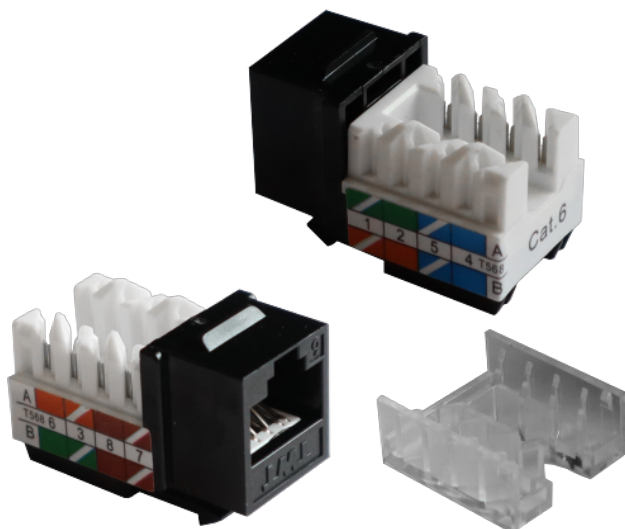

Description

The module can be used to complete unshielded telecommunication sockets installed in a wall trunk, in a wall box, and for installation in modular patch panels (see the compatibility table).

Category 6 compliant.

The module has a standard Keystone form-factor and can be used not only in LANMASTER socket adapters, but also in socket adapters from other manufacturers.

An eight-pin RJ-45 socket is mounted on the front side of the module; there is a block for eight IDC110 contacts on the side located at an angle of 90° to the front surface of the module.


The insulation displacement contact method is used (IDC) to terminate incoming cable.

There is a wiring diagram for the cable conductors between the IDC pins in accordance with the T568A and T568B wire map for ease of installation.

The module is equipped with a protective insert that provides additional fixation of cable conductors terminated in IDC block and prevents the conductors from being pulled out when the cable is overstretched.

Module dimensions

Module package

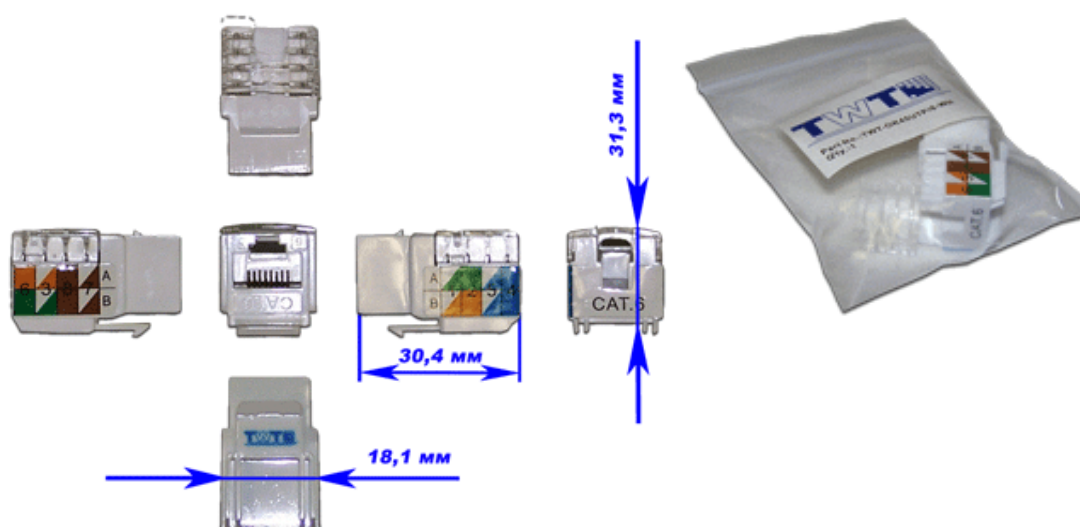

Model range

TWT-OK45UTP/6-WH	RJ45 Keystone module, category 6, UTP, 90 degrees, white
TWT-OK45UTP/6-BK	RJ45 Keystone module, category 6, UTP, 90 degrees, black

Product descriptions are listed according to the available information at the time of publication. Product specifications can be changed without advanced notification. More detailed and exact information can be obtained from the official partners and distributors of LANMASTER.